


Digital Dual Temperature Gauge

P/n 310.006

(inside/outside temperature display)

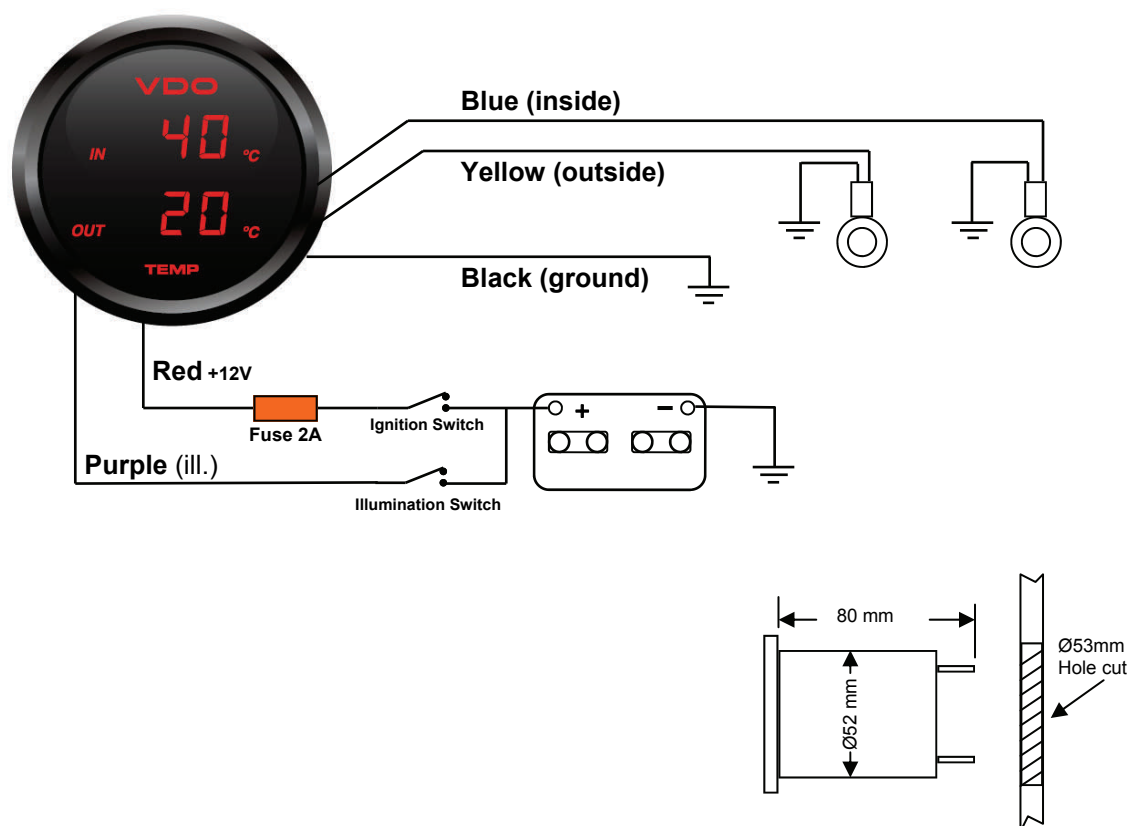

Installation

- Cut a $\text{Ø}53\text{mm}$ diameter hole and fit gauge.
Fit the extension posts to the studs protruding at the rear of the gauge
Insert the gauge into the hole, and place the 'U' bracket over the extension posts.
Use the nuts provided to fix the 'U' bracket to the gauge.
- Connect the **Black** wire to a good chassis ground.
- Connect the **Red** wire to a fused (min. 2A) accessory or the ignition switch circuit.
- Connect the **Blue** and **Yellow** signal wires to the temperature sensors as per above picture.
The temperature sensors should be mounted to a solid surface, out of wind flow or direct sunlight and away from any heat source (ie. Engine, radiator, exhaust)
- Connect the remaining temperature sensor wires to a good chassis ground.
* The temperature sensors are not polarity sensitive.
- Connect the **Purple** wire to a 12V illumination circuit to dim the display by 50%
If the **Purple** wire is not connected, then it should be grounded.

Note:

- Interior sensor should be mounted low, away from windscreen and air vents. Eg. Centre console.
- Exterior sensor should be mounted low, away from sun and engine heat, and out of wind flow.

If you are unsure, seek the help of a professional installer.

General Notes:

This product is designed for use **ONLY** with a 12V electrical system

Mark and cut hole on instrument panel, hole size should be 1mm greater than gauge body diameter, eg: (52mm diameter gauge cut a 53mm diameter hole)

Ensure clearance for the gauge depth, eg: 50mm or 80mm, depending of type of gauge installed.

Before beginning installation, disconnect the negative terminal on the battery, otherwise you risk a short circuit. If the vehicle is supplied by auxiliary batteries, you must also disconnect them.

Insulate exposed stranded wires to prevent short circuits.

When working on the on-board electronics, do not wear metallic or conductive jewellery such as necklaces, bracelets, rings, etc.

When installation is completed, re-connect the ground cable tightly to the negative terminal of the battery.

Check gauge for correct function.

Warranty Policy

VDO warrants all merchandise against defects in factory workmanship and materials for a period of 24 months after purchase.

This warranty applies to the first retail purchaser and covers only those products exposed to normal use or service.

Provisions of this warranty shall not apply to a VDO product used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the product, or misapplication, misuse, negligence or accident.

On any part or product found to be defective after examination by VDO will only repair or replace the merchandise through the original point of purchase or on a direct basis.

VDO assumes no responsibility for diagnosis, removal and/or installation labour, loss of vehicle use, loss of time, inconvenience or any other expenses.

The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty of merchantability or fitness, and any other obligation on the part of VDO, or selling dealer.

The illustrations, information and specifications presented and referred to in this installation instructions are believed to be correct at the time of publication; however, accuracy cannot be absolutely guaranteed. VDO reserves the right to make changes from time to time without notice or obligation, in the specifications, design, colour or materials, and to change or discontinue models.